




AMERICAN BEARING MFG.CORP.

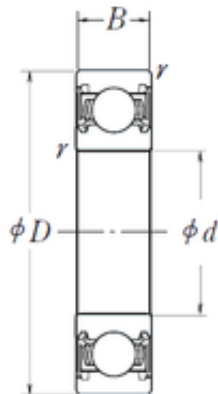

10 mm x 26 mm x 8 mm NSK 6000DDU deep groove ball bearings

Bearing No. 6000DDU

6000DDU Bearing 2D drawings and 3D CAD models

| | |
|-------------------------------|--------------------------|
| Size | 10x26x8 mm |
| Bore Diameter | 10 mm |
| Outer Diameter | 26 mm |
| Width | 8 mm |
| d | 10 mm |
| D | 26 mm |
| B | 8 mm |
| C | 8 mm |
| r min. | 0,3 mm |
| da min. | 12 mm |
| da max | 13 mm |
| Da max. | 24 mm |
| ra max. | 0,3 mm |
| Weight | 0,018 Kg |
| Basic dynamic load rating (C) | 4,55 kN |
| Basic static load rating (C0) | 1,97 kN |
| (Grease) Lubrication Speed | 22 000 r/min |
| Category | Single Row Ball Bearings |
| Inventory | 0.0 |
| Manufacturer Name | NSK |
| Minimum Buy Quantity | N/A |
| Weight / Kilogram | 0.019 |
| EAN | 0029176062650 |
| Product Group | B00308 |
| Enclosure | 2 Seals |



AMERICAN BEARING MFG.CORP.

| | |
|---------------------------------|--|
| Precision Class | ABEC 1 ISO P0 |
| Maximum Capacity / Filling Slot | No |
| Rolling Element | Ball Bearing |
| Snap Ring | No |
| Internal Special Features | No |
| Cage Material | Steel |
| Enclosure Type | Contact Seal |
| Internal Clearance | C0-Medium |
| Inch - Metric | Metric |
| Long Description | 10MM Bore; 26MM Outside Diameter; 8MM Outer Race Width; 2 Seals; Ball Bearing; ABEC 1 ISO P0; No Filling Slot; No Snap Ring; No Internal Special Features; C0-Medium Internal Clearance; Steel Cage; C |
| Other Features | Deep Groove Rubber Seal |
| Category | Single Row Ball Bearing |
| UNSPSC | 31171504 |
| Harmonized Tariff Code | 8482.10.50.68 |
| Noun | Bearing |
| Keyword String | Ball |
| Manufacturer URL | http://www.nskamericas.com |
| Manufacturer Item Number | 6000DDU |
| Weight / LBS | 0.0397 |
| Outer Race Width | 0.315 Inch 8 Millimeter |
| Outside Diameter | 1.024 Inch 26 Millimeter |
| Inner Race Width | 0 Inch 0 Millimeter |
| Bore | 0.394 Inch 10 Millimeter |
| SRI | 2.46 |
| hidYobi | 6000DDU |
| | |



AMERICAN BEARING MFG.CORP.

| | |
|------------|-------------|
| LangID | 1 |
| D_ | 26 |
| SREX | 0.015 |
| B_ | 8 |
| da min | 12 |
| hidTable | ecat_NSRDGB |
| SRE | 2.67 |
| mass | 0.018 |
| GRS rpm | 22000 |
| ra | 0.3 |
| SRIX | 0.015 |
| D_a | 24 |
| SRIN | -0.015 |
| C0 | 1.97 |
| fo | 12.4 |
| SREN | -0.015 |
| DE_ | 22.762 |
| Prod_Type3 | DGBB_SR_DD |
| DA_ | 4.762 |
| bomp | 0 |
| Z_ | 7 |
| yobi | 6000DDU |
| C_conv | 4550 |
| ALPHA_ | 0 |
| SDM_ | 18 |
| r | 0.3 |
| KBRG | 6161 |
| SBRG | 10 |
| DI_ | 13.238 |