




AMERICAN BEARING MFG.CORP.

66,675 mm x 136,525 mm x 46,038 mm NSK
H715341/H715311 tapered roller bearings

Bearing No. H715341/H715311

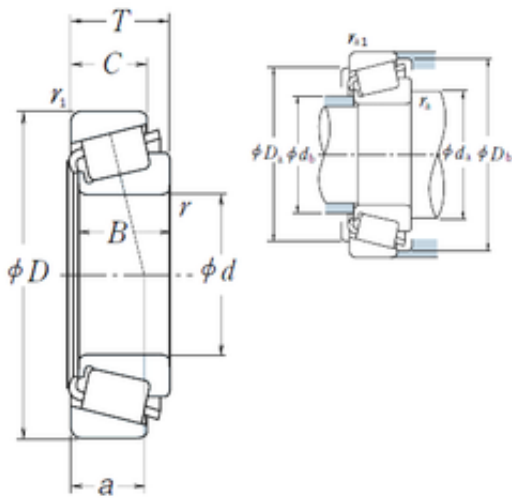

H715341/H715311 Bearing 2D drawings and 3D CAD models

Size	66.675x136.525x46.038 mm
Bore Diameter	66,675 mm
Outer Diameter	136,525 mm
Width	46,038 mm
d	66,675 mm
D	136,525 mm
T	46,038 mm
B	46,038 mm
C	36,512 mm
ra1 max.	3,3 mm
a	37,1 mm
r min.	3,5 mm
r1 min.	3,3 mm
Da	118 mm
db	83 mm
ra max.	3,5 mm
da	89 mm
Db	132 mm
Weight	3,301 Kg
Basic dynamic load rating (C)	233 kN
Basic static load rating (C0)	370 kN
(Grease) Lubrication Speed	2600 r/min
(Oil) Lubrication Speed	3400 r/min
Calculation factor (e)	0,47
Calculation factor (Y0)	0,7



AMERICAN BEARING MFG.CORP.

LangID	1
ALP23	0
outer r	3.3
ALP22	0
D_	136.525
ALP21	35
SHOG_yobi	H715341/H715311
RAr	216.5
inner r	3.5
GRS rpm	2600
D_b	132
D_a	118
DE_	119.497
SLR	35.6
Prod_Type3	TRBSR_ID_A
BETA_	1
ALPHA_	17.5
SDM_	106.757
DA1	14.481
DA2	12.107
hidYobi	H715341/H715311
Y1	1.3
B_	46.038
Oil rpm	3400
hidTable	ecat_NSTPRI
Y0	0.7
inner ra	3.5
outer rb	3.3
C0	370
CUP	0.961
e	0.47
DA_	13.299



AMERICAN BEARING MFG.CORP.

BET21	3
BET22	50
BET23	0
Z_	22
C_	36.512
yobi	H715341/H715311
KBRG	3161
CONE	2.34
DI_	93.834