




AMERICAN BEARING MFG.CORP.

40 mm x 68 mm x 9 mm NTN 16008 deep groove ball bearings

Bearing No. 16008

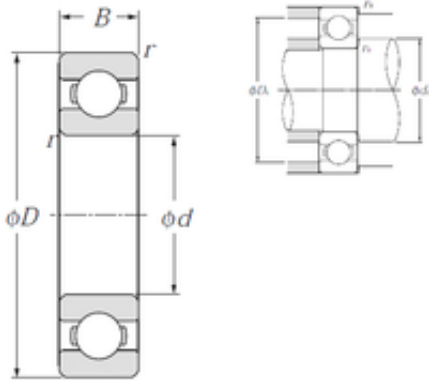

16008 Bearing 2D drawings and 3D CAD models

Size	40x68x9 mm
Bore Diameter	40 mm
Outer Diameter	68 mm
Width	9 mm
d	40 mm
D	68 mm
B	9 mm
C	9 mm
r min.	0,3 mm
da min.	42 mm
Da max.	66 mm
ra max.	0,3 mm
Weight	0,125 Kg
Basic dynamic load rating (C)	12,6 kN
Basic static load rating (C0)	9,65 kN
(Grease) Lubrication Speed	10 000 r/min
(Oil) Lubrication Speed	12 000 r/min
rs min	0.3 mm
Radial clearance class	CN
Mass	0.12 kg
Dynamic load, C	12.6 kN
Static load, C0	9.65 kN
Fatigue limit load, Cu	0.44 kN
f0	16
Nlim (oil)	12,000 rpm



AMERICAN BEARING MFG.CORP.

Nlim (grease)	10,000 rpm
Min operating temperature, Tmin	-20 ° C
Max operating temperature, Tmax	120 ° C
Characteristic cage frequency, FTF	0.44 Hz
Characteristic rolling element frequency, BSF	8.39 Hz
Characteristic outer ring frequency, BPF0	6.62 Hz
Characteristic inner ring frequency, BRF1	8.38 Hz
da min	42 mm
Da max	66 mm
ra max	0.3 mm
Category	Single Row Ball Bearings
Inventory	21.0
Manufacturer Name	NTN
Minimum Buy Quantity	N/A
Weight / Kilogram	0.128
EAN	4547359010145
Product Group	B00308
Enclosure	Open
Precision Class	ABEC 1 ISO P0
Maximum Capacity / Filling Slot	No
Rolling Element	Ball Bearing
Snap Ring	No
Internal Special Features	No
Cage Material	Steel
Internal Clearance	C0-Medium
Inch - Metric	Metric
Long Description	40MM Bore; 68MM Outside Diameter; 9MM



AMERICAN BEARING MFG.CORP.

	Outer Race Diameter; Open; Ball Bearing; ABEC 1 ISO P0; No Filling Slot; No Snap Ring; No Internal Special Features
Category	Single Row Ball Bearing
UNSPSC	31171504
Harmonized Tariff Code	8482.10.50.68
Noun	Bearing
Keyword String	Ball
Manufacturer URL	http://www.ntnamerica.com
Manufacturer Item Number	16008
Weight / LBS	0.283
Outside Diameter	2.677 Inch 68 Millimeter
Outer Race Width	0.354 Inch 9 Millimeter
Bore	1.575 Inch 40 Millimeter
bore diameter:	40 mm
finish/coating:	Uncoated
outside diameter:	68 mm
bearing material:	High Carbon Chrome Steel
overall width:	9 mm
cage material:	Steel
bore type:	Round
inner ring width:	9 mm
closure type:	Open
outer ring width:	9 mm
row type & fill slot:	Single Row Non-Fill Slot
maximum rpm (grease):	10000 rpm
snap ring included:	Without Snap Ring
maximum rpm (oil):	12000 rpm
internal clearance:	CN
fillet radius:	0.3 mm
operating temperature	-40 to 120 ° C



AMERICAN BEARING MFG.CORP.

range:	
maximum rpm:	12000 RPM
dynamic load capacity:	12600 N
series:	600
static load capacity:	9650 N
manufacturer product page:	Click here
precision rating:	Class 0